

# Double Cloud 9

HodgePodge



Published: September 2024
















## Double Cloud 9 Product Specification

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. Climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

Double Cloud 9: Where Fun Doubles at the Playground! Swing together in classic style, accommodating many kids at once for an unforgettable swinging experience.

# Double Cloud 9

## 95.171.311

	Product Family	<b>HodgePodge</b>
	Length x Width x Height (m) Length x Width x Height ("')	<b>6,3 x 1,3 x 2,1</b> <b>20-7 x 4-2 x 6-9</b>
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("')	<b>6,7 x 5,5</b> <b>10,0 x 7,5</b> <b>32-7 x 24-5</b>
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("')	<b>1,24</b> <b>6-2</b>
	Age	<b>3</b>
	Minimum Space required acc. to DIN EN 1176 (m <sup>2</sup> ) Minimum Space required acc. to ASTM 1487 (ft <sup>2</sup> )	<b>36,8</b> <b>600,7</b>
	Number of Foundations	<b>3</b>
	Concrete Volume C20/C25 (m <sup>3</sup> ) Concrete Volume C20/C25 (ft <sup>3</sup> )	<b>1,1</b> <b>38,8</b>
	Number of skilled Installers required	<b>2</b>
	Installation Time without Foundation	<b>3 hours</b>
	Dimensions of largest Part (m) Dimensions of largest Part ("')	<b>0,2 x 0,2 x 3,1</b> <b>0-8 x 0-8 x 10-3</b>
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	<b>70</b> <b>154,3</b>
	Shipping Volume (m <sup>3</sup> ) Shipping Volume (ft <sup>3</sup> )	<b>2,1</b> <b>74,16</b>
	Total Weight (kg) Total Weight (lbs)	<b>460</b> <b>1014,1</b>
	Spare Part Guarantee	<b>Lifelong</b>

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data

Technical changes are reserved.  
The following text can also be used for tenders.

### Nest Swing Seat:

Ø 1200 mm (3'-11 1/4"). Galvanized steel ring covered with shock-absorbing material and wrapped with rope. Tight-knit net made of rope Ø 16 mm (5/8") is hung into the ring. The connection parts are made of stainless steel.

### Spheres:



Framework®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

### Posts:

Steel pipes Ø 133 mm (5 1/4"), wall thickness 7,1 mm (9/32"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

### Ropes:

U-Rope®-round strand ropes with galvanized and covered wires. External strands with non-abrasive UV-resistant polyester-yarn (no polypropylene), Ø 16 mm (5/8").

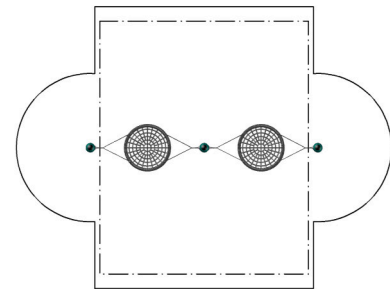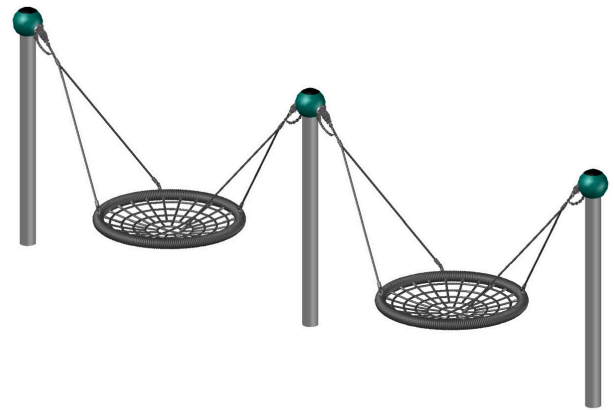

1:200