

# Fireball.2.2

HodgePodge



Published: April 2023

## Fireball.2.2



### Product Specification

HodgePodge Playpoints are climbers or rockers or twisters. They are Playpoints first and foremost, but they are also very nice pieces of public design, and they are sculptural. All HodgePodge Playpoints are high-end engineered units made from high-quality materials like stainless steel with a brushed finish, powder coated recycled aluminum connectors, high density polyethylene (HDPE) panels and ITR-bearings for maximum safety and durability.

The Fireball is the best place in town for those who love to get dizzy occasionally. The rotation axis is inclined at 2°. Move your body to and around the axis and you will feel what gravity is. The Fireball is absolutely strong enough for two or more users to take a spin.

## 90.260.307

	Product Family	<b>HodgePodge</b>
	Length × Width × Height (m) Length × Width × Height ("")	<b>1,0 × 1,0 × 1,3</b> <b>3-3 × 3-3 × 4-3</b>
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	<b>5,0 × 5,0</b> <b>4,7 × 4,7</b> <b>15-3 × 15-3</b>
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	<b>0,86</b> <b>2-10</b>
	Age	<b>5</b>
	Minimum Space required acc. to DIN EN 1176 (m <sup>2</sup> ) Minimum Space required acc. to ASTM 1487 (ft <sup>2</sup> )	<b>19,5</b> <b>210,0</b>
	Number of Foundations	<b>1</b>
	Concrete Volume C20/C25 (m <sup>3</sup> ) Concrete Volume C20/C25 (ft <sup>3</sup> )	<b>0,5</b> <b>17,7</b>
	Number of skilled Installers required	<b>2</b>
	Installation Time without Foundation	<b>2 hours</b>
	Dimensions of largest Part (m) Dimensions of largest Part ("")	<b>1,0 × 1,0 × 1,6</b> <b>3-3 × 3-3 × 5-3</b>
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	<b>110</b> <b>243</b>
	Shipping Volume (m <sup>3</sup> ) Shipping Volume (ft <sup>3</sup> )	<b>1,1</b> <b>39</b>
	Total Weight (kg) Total Weight (lbs)	<b>125</b> <b>276</b>
	Spare Part Guarantee	<b>Lifelong</b>

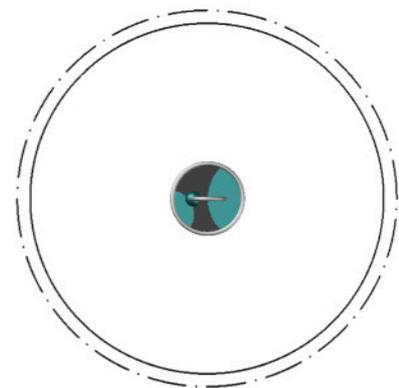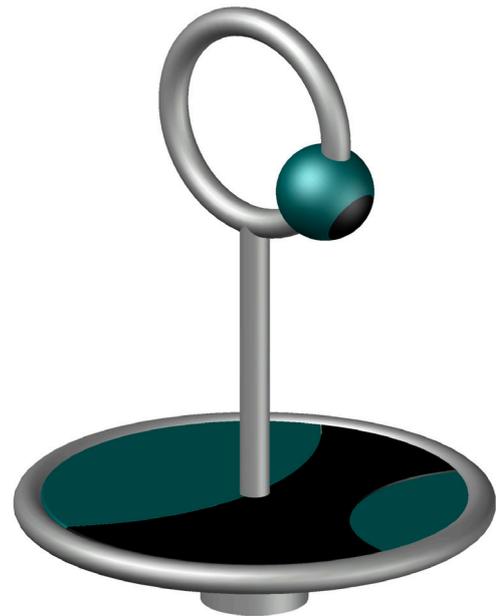

1:100

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data

Technical changes are reserved.  
The following text can also be used for tenders.

### Turntable:

The stainless steel plate with a diameter of 960 mm (3'-2") is covered with HDPE plates and surrounded by a welded stainless steel tube with a diameter of 60,3 mm (2 3/8").

### Tube:

Framework®- stainless steel tube Ø 60,3 mm (2 3/8").

### Sphere:

Framework®- aluminum ball connectors, Ø 200 mm (7 7/8"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

### Stand:

The fully integrated bearing unit forms a self-contained system and is therefore particularly insensitive to weather influences and requires little maintenance.

### Covering:

The non-skid HDPE plates with a thickness of 19 mm (3/4") are screwed flat on the turntable.