

# Picadilly Circle.2.2

HodgePodge



Published: June 2023
















## Picadilly Circle.2.2 Product Specification



HodgePodge Playpoints are climbers or rockers or twisters. They are Playpoints first and foremost, but they are also very nice pieces of public design, and they are sculptural. All HodgePodge Playpoints are high-end engineered units made from high-quality materials like stainless steel with a brushed finish, powder coated recycled aluminum connectors, high density polyethylene (HDPE) panels and ITR-bearings for maximum safety and durability.

A ride on the Picadilly Circle is a great experience, as the speed of spinning depends on how the players work together – every ride is a unique adventure. Hop aboard, hold on tight, and be ready for a spin.

# Picadilly Circle.2.2

## 90.260.304

	Product Family	<b>HodgePodge</b>
	Length x Width x Height (m) Length x Width x Height ("")	<b>1,9 x 1,9 x 1,3</b> <b>6-1 x 6-1 x 4-0</b>
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	<b>5,9 x 5,9</b> <b>5,5 x 5,5</b> <b>18-1 x 18-1</b>
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	<b>0,6</b> <b>2-0</b>
	Age	<b>2-12</b>
	Minimum Space required acc. to DIN EN 1176 (m <sup>2</sup> ) Minimum Space required acc. to ASTM 1487 (ft <sup>2</sup> )	<b>26,7</b> <b>255,0</b>
	Number of Foundations	<b>1</b>
	Concrete Volume C20/C25 (m <sup>3</sup> ) Concrete Volume C20/C25 (ft <sup>3</sup> )	<b>0,3</b> <b>10,6</b>
	Number of skilled Installers required	<b>2</b>
	Installation Time without Foundation	<b>2 hours</b>
	Dimensions of largest Part (m) Dimensions of largest Part ("")	<b>1,9 x 1,9 x 1,5</b> <b>6-3 x 6-3 x 4-11</b>
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	<b>200</b> <b>441</b>
	Shipping Volume (m <sup>3</sup> ) Shipping Volume (ft <sup>3</sup> )	<b>6</b> <b>212</b>
	Total Weight (kg) Total Weight (lbs)	<b>240</b> <b>530</b>
	Spare Part Guarantee	<b>Lifelong</b>

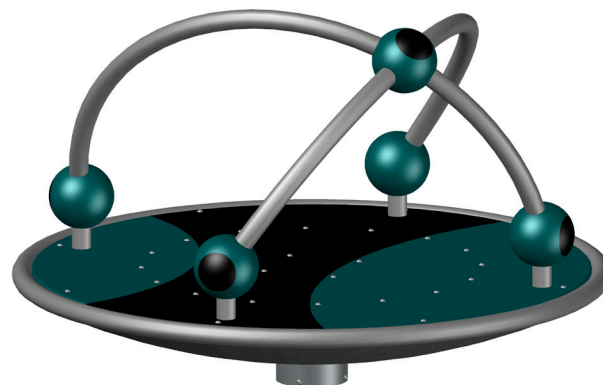

1:200

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

### Turntable:

The stainless steel plate with a diameter of 1,9 m (6'-1") is covered with HDPE plates and surrounded by a welded stainless steel tube with a diameter of 60,3 mm (2 3/8").

### Tubes and Balls:

The bent stainless steel tubes with a diameter of 60,3 mm (2 3/8") are connected by Frameworx® aluminum balls with a diameter of 200 mm (7 7/8"), these are sandblasted, powder-coated without solvents and securely closed with durable EPDM caps.

### Stand:

The fully integrated bearing unit forms a self-contained system and is therefore particularly insensitive to weather influences and requires little maintenance.

### Covering:

The non-skid HDPE plates with a thickness of 19mm (3/4") are screwed flat on the turntable.