

# Access Whirl

HodgePodge



Published: April 2023

## Access Whirl
















### Product Specification



HodgePodge Playpoints are climbers or rockers or twisters. They are Playpoints first and foremost, but they are also very nice pieces of public design, and they are sculptural. All HodgePodge Playpoints are high-end engineered units made from high-quality materials like stainless steel with a brushed finish, powder coated aluminium connectors, high density polyethylene (HDPE) panels and ITR-bearings for maximum safety and durability.

The Access Whirl is unique in the market. The product is easily accessible and children have great support and grip because of the net structure. The shape provides a safe cocoon so that children are more secure when the product spins around.

# Access Whirl

## 90.261.200

	Product Family	<b>HodgePodge</b>
	Length × Width × Height (m) Length × Width × Height ("")	<b>1,3 × 1,1 × 1,1</b> <b>4-1 × 3-7 × 3-4</b>
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	<b>5,3 × 5,3</b> <b>6,8 × 6,8</b> <b>22-1 × 22-1</b>
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	<b>1,01</b> <b>3-4</b>
	Age	<b>5-12</b>
	Minimum Space required acc. to DIN EN 1176 (m <sup>2</sup> ) Minimum Space required acc. to ASTM 1487 (ft <sup>2</sup> )	<b>21,6</b> <b>383,2</b>
	Number of Foundations	<b>1</b>
	Concrete Volume C20/C25 (m <sup>3</sup> ) Concrete Volume C20/C25 (ft <sup>3</sup> )	<b>0,3</b> <b>4</b>
	Number of skilled Installers required	<b>1</b>
	Installation Time without Foundation	<b>4 hours</b>
	Dimensions of largest Part (m) Dimensions of largest Part ("")	<b>1,3 × 1,0 × 1,1</b> <b>4-1 × 3-7 × 3-4</b>
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	<b>80</b> <b>175</b>
	Shipping Volume (m <sup>3</sup> ) Shipping Volume (ft <sup>3</sup> )	<b>1,9</b> <b>70</b>
	Total Weight (kg) Total Weight (lbs)	<b>170</b> <b>375</b>
	Spare Part Guarantee	<b>Lifelong</b>

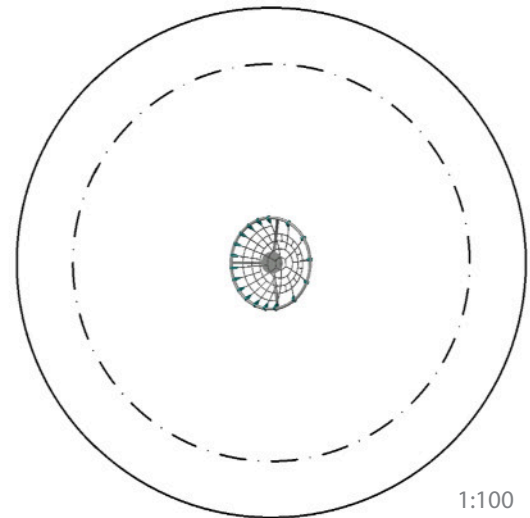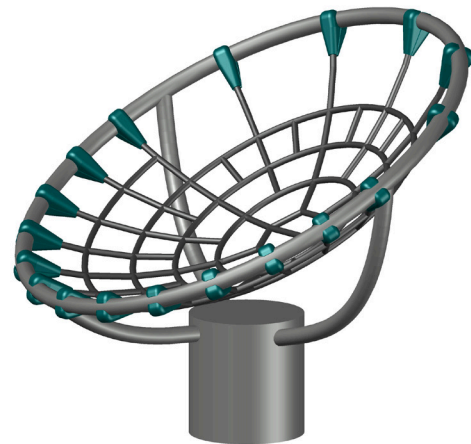

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

### Tubes:

The bent steel tubes with a diameter of 42 mm (1 5/8"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

### Stand:

The steel stand with a diameter of 219 mm (8 5/8") has a fully integrated bearing unit forming a self-contained system and therefore particularly insensitive to weather influences and requires little maintenance.

### Ropes:

U-Rope®-round strand ropes with galvanized and covered wires. External strands with non-abrasive UV-resistant polyester-yarn (no polypropylene), Ø 16 mm (5/8").

### Planar Net:

Rope crossing points localized by durable, drop forged aluminum ballknots (no plastic). Net attachment to the tube with cast aluminum pipe clamps.