

Double Cloud 9 – Product Specification



HodgePodge – A variety of study and durable sport and play elements

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities.

Climbing trees, a Wasp's nest, Volleyball nets for sporting activities, cable rides for fun and excitement.

Double Cloud 9 – At a glance.


Product Family:	HodgePodge	Number of Foundations:	3 pc.
Item Number:	95.171.311	Concrete Volume C20/C25:	1,03 m³ (36.35 ft³)
Children's Age:	3+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	1.80 m (5'-11")	Installation Time without foundation:	4 hours
Length x Width x Height:	6.2 m x 1.2 m x 2.0 m (20'-4" x 3'-11" x 6'-8")	Dimensions of largest part:	Ø0,14x3,1 m (0'-4" x 10'-2")
Protective Surfacing Area (DIN EN 1176):	9.2 m x 6.4 m	Weight of heaviest part:	70 kg (154.3lbs)
Protective Surfacing Area (ASTM 1487):	9.9 m x 8.1 m (32'-4" x 26'-7")	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	59,87 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	59,96 m²	Certificate according to EN 1176:	No.: Z2.16.01.10256.259 TÜV Product Service


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Double Cloud 9 – Product Specification

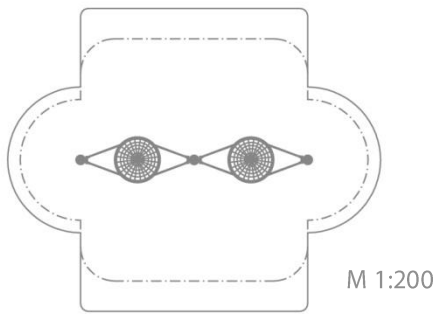

Technical Data.

The following text can also be used for tenders.

Steel posts Jan:

Steel pipes \varnothing 133 mm (5 1/4") with rounded cast aluminum post top, minimum wall thickness 7.1mm (1/4"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.

Nodes:

Framework-aluminum ball connectors; \varnothing 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

Seat:

Galvanized steel ring covered with shock-absorbing material and wrapped with fiber rope (\varnothing 20 mm); coil: 115 mm x 95 mm); tight-knit net made of Usacord rope (16 mm) is hung into the ring

Ropes:

U-Rope-round strand ropes with steel cores, \varnothing 16mm (5/8") – unless otherwise noted; with galvanized wires, external strands covered with non-abrasive UV-resistant Polyester-yarn.




Berliner
Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com