Terrano.2258 - Product Specification



Terranos net landscapes - straight posts and connecting elements

Our netscapes offer children of all ages plenty of space for any kind of climbing, crawling, balancing and other physical activities. The highly accessible components are also the ideal place to get engaged in imaginative play or just hang around and relax.

The range of rope accessories can turn any space into a netscape. Whether straight or sloping, there is always space for a two-dimensional or a hand-over-hand climbing component. And if a tree should be in the way, we simply integrate it and make it the focal point of your playground

Terrano.2258 - At a glance.

Product Family: Terranos & Terranova Number of Foundations: 19 pc. Item Number: Concrete Volume C20/C25: 95.172.258 13,6 m³ Children's Age: Number of skilled installers required: 5+ Fall Height (DIN EN 1176): 2.4 m (7'-10") Installation Time without foundation: 20 hours Length x Width x Height: 12.0 m x 6.6 m x 4.0 m Dimensions of largest part: 5.0 m x Ø 0.1 m (39'-5" x 21'-9" x 13'-

Protective Surfacing Area (DIN EN 1176): 15.7 m x 10.8 m Weight of heaviest part:
Protective Surfacing Area (ASTM 1487): 15.7 m x 10.3 m Shipping Volume:

(51'-6" x 33'-9") Spare part guarantee:
Minimum space required DIN EN 1176: 156 m² Certificate according to DIN EN 1176:
Minimum space required ASTM 1487: 158 m²


Weight of heaviest part:
Shipping Volume:
Upon request
Lifelong
Certificate according to DIN EN 1176:
No.: Z2.16.01.10256.255
TÜV Product Service




D-13407 Berlin
Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com
Revision: April 2016
Page 1

Terrano.2258 - Product Specification

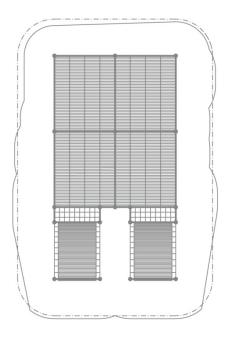

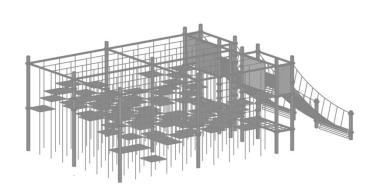

M 1:200

Technical Data.

The following text can also be used for tenders.

- Rubber elements in different heights
- Planar nets
- Towers
- Rubber ramps

Posts

Steel pipes Ø 133 mm (5 ¼"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Terranos clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos steel posts; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); rope-diameter Ø 16 mm (5/8")

Tube framework:

Frameworx-steel tubes, Ø 60.3 mm (2 3/8"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Planar nets:

Rope Ø 16mm (5/8"); mesh size minimum 250 x 250 mm (9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic)

Rubber membranes:

Rubber comprised of durable, vandal-resistant conveyor belt material; rope Ø 16 mm (5/8")

Wall panels:

HDPE-panel, thickness 19mm (3/4")

Rubber ramps:

Rubber comprised of durable, vandal-resistant conveyor belt material; rope Ø 16 mm (5/8"); climbing handles: HDPE



Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33



info@berliner-seilfabrik.com
www.berliner-seilfabrik.com Revision: April 2016 Page 2