The Globe - Product Specification



The Joe Brown Collection - Natural Play

In memory of and homage to the pioneer of rope play equipment, the Berliner Seilfabrik is releasing a new range of equipment called "the Joe Brown Collection" in autumn 2014.

Climbing in a three-dimensional net helps children to develop their psychomotor skills. Now Berliner Seilfabrik presents the classic play idea of a three-dimensional net climber in a new surrounding. The outer frame of the Joe Brown Collection is made from timber: glued laminated timber

The Globe - At a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

Joe Brown Collection 90.100.04.31 5+ 1.59 m (5'-3") 4.4 m x 4.4 m x 3.8 m (14'-4"x 14'-4" x 12'-4") 7.5 m x 7.5 m 8.0 m x 8.0 m (26'-4" x 26'-4")

41.38 m²

48.03 m² (517 ft²)

Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of heaviest part: Shipping Volume: Spare part guarantee: 8 pc. 2.4 m³ (85 ft³) 3 persons 8 hours 2.9 x 0.8 x 0.2 m (9'-7"x 2'-8" x 0'-8") 80 kg (177 lbs) 8 m³ (283 ft³) Lifelong




Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33



info@berliner-seilfabrik.com
www.berliner-seilfabrik.com
Revision: April 2016
Page 1

The Globe - Product Specification

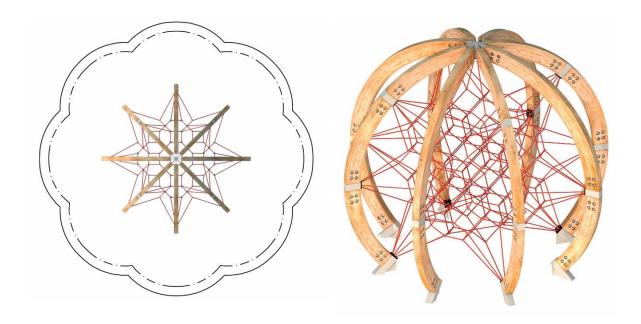

Technical Data.

The following text can also be used for tenders.

Climbing Ball "The Globe" from the Joe Brown Collection, consisting of a larch timber structure with a 17-fold Spacial net, equipped with the ASTEM TT tension system concealed in the containers for clamping the spatial net. The foundation parts made of powder-coated steel, fitted into the wood elements, ensure the installation of the support members without direct involvement of the bottom timber carrier with the ground.

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires; external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene): Ø 18 mm (11/16")

Spacial netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situreplaceable rope strands (no special tools required)

Net tensioning system:

Frameworx® clamping points; 120 x 120 x 230 mm; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/epoxy-/polyester-process; connected to wooden girders with bolts on connection flanges, incorporating an Astem TT net tensioning system; securely closed with durable EPDM- caps

Structural:

Elements of glued laminated-larch timber, connected through Frameworx® clamping points, coennection flanges





Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33