

Triple Swingo – Product Specification



HodgePodge – A variety of study and durable sport and play elements

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities.

Climbing trees, a Wasp's nest, Volleyball nets for sporting activities, cable rides for fun and excitement.

At a glance.


Product Family:	HodgePodge	Number of Foundations:	8 pc.
Item Number:	90.340.004	Concrete Volume C20/C25:	1.0 m³ (35.3 ft³)
Children's Age:	3+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	1.50 m (4'-11")	Installation Time without foundation:	6 hours
Length x Width x Height:	1.7 m x 10.8 m x 2.1 m (5'-6" x 35'-5" x 6'-12")	Dimensions of largest part:	0.1 x 0.1 x 3.6 m (0'-4" x 0'-4" x 11'-11")
Protective Surfacing Area (DIN EN 1176):	7.2 m x 10.8 m	Weight of heaviest part:	25 kg
Protective Surfacing Area (ASTM 1487):	8.0 m x 14.5 m (26'-3" x 47'-5")	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	71.8 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	95.6 m² (1,029.3 sf)	Certificate according to EN 1176:	No.: Z2.16.01.10256.259 TÜV Product Service


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Triple Swingo – Product Specification

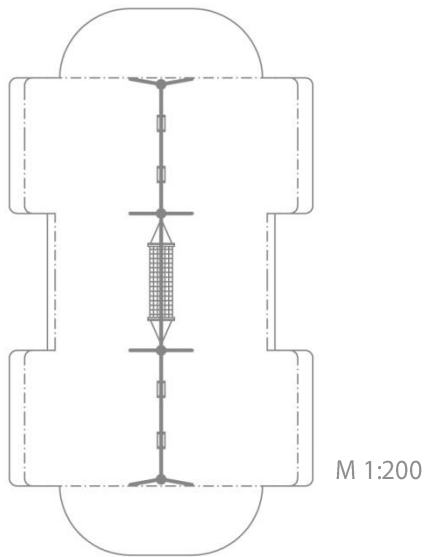

Technical Data.

The following text can also be used for tenders.

- 3 connected Swingo.02
- 4 Swing seats
- 1 Hammock

Nodes:

Framework-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); rope-diameter Ø 16 mm (5/8")

Tube framework:

Framework-steel tubes, Ø 60.3 mm (2 3/8"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Swing seat:

The durable black ebonite seat is hanging on a stainless steel chain with pivot bearings fixed to the horizontal pipe in maintenance-free PA-bushes

Hammock:

Rope Ø 16 mm (5/8"); hammock net with mesh width approx. 100 x 100 mm (3-15/16" x 3-15/16"); with two in situ-replaceable square rungs; rungs comprised of stainless steel profile with aluminum end caps; two swivel joints connect to aluminum clamps

