


Calisthenics.01

HodgePodge



Published: August 2023

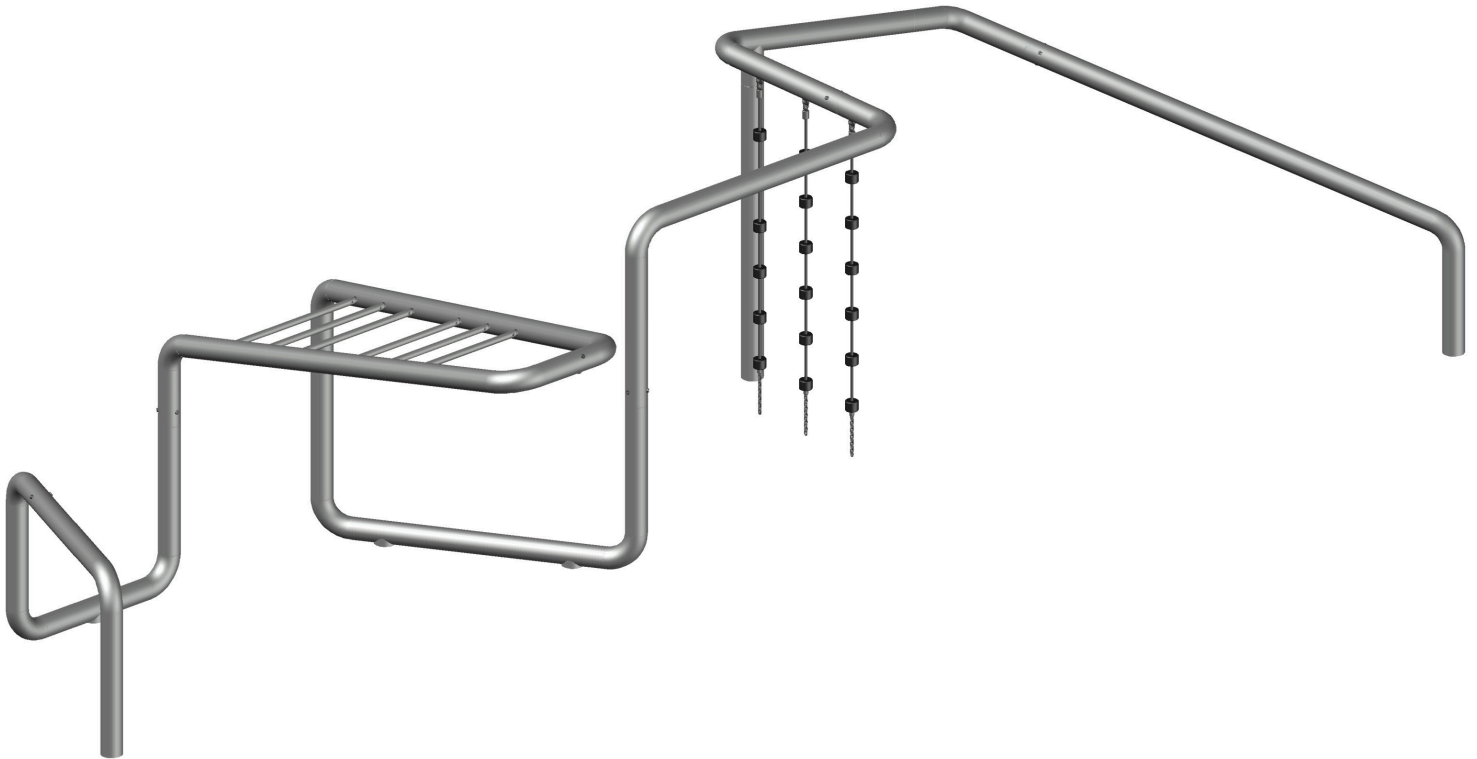














Calisthenics.01


Product Specification

This is where it gets sporty! Pull-ups, dips, and push-ups: Expand the range of your park or playground with our large and small Calisthenics Installations for the physical activity of young people and adults.

Calisthenics.01

95.190.553

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("-")	9,8 × 3,2 × 2,4 31-11 × 10-5 × 7-10
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("-")	* * *
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("-")	* *
	Age	
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	* *
	Number of Foundations	5
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	5,6 200
	Number of skilled Installers required	2
	Installation Time without Foundation	4 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("-")	3.5 × 0.6 × 0.65 11-6 × 2-0 × 2-2
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	201 450
	Shipping Volume (m³) Shipping Volume (ft³)	16,22 573
	Total Weight (kg) Total Weight (lbs)	1860 4100
	Spare Part Guarantee	Lifelong

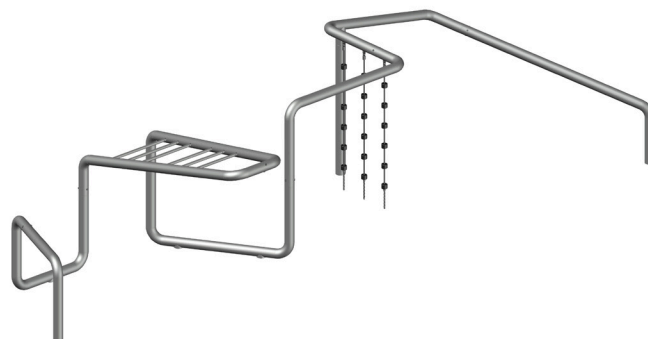

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

* Safety areas as well as free fall height are determined according to a play equipment standard or relevant outdoor fitness standard, depending on the installation. Individual planning is necessary.

Technical Data

Technical changes are reserved.
The following text can also be used for tenders.

Tubes:

Steel pipes, Ø 133 mm (5 1/4"), wallthickness 7,1 mm (9/32"). Anti-corrosion treatment and color finish: sandblasting, solvent-free epoxy-/ polyester-process.

Pullup Bars:

Stainless steel pipes Ø 40 mm (1 9/16"), wallthickness 5 mm (3/16") smoothed and polished.

Climbing Rope:

Rope Ø 18 mm (11/16") with durable ebonite cylinders. Distance between cylinders approx. 300 mm (11 13/16"). The ebonite cylinders are fixed to the rope with aluminum ferrules.