

Calisthenics.04

HodgePodge


















Published: March 2023



Calisthenics.04

Product Specification

Calisthenics.04 offers countless fitness opportunities on horizontal bars of different heights, a balance bar, wall bars, and a monkey swing. The modular nature of the system, with its posts and Terranos-Clamps, allows for the creation of multifaceted calisthenics equipment of any size.

95.190.507

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("")	5,7 × 4,8 × 3,3 18-6 × 15-6 × 10-8
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	 * * *
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	 * *
	Age	
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	 * *
	Number of Foundations	10
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	3,5 125
	Number of skilled Installers required	2
	Installation Time without Foundation	6 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	4,2 × 0,14 × 0,14 13-10 × 0-6 × 0-6
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	67 150
	Shipping Volume (m³) Shipping Volume (ft³)	7,01 248
	Total Weight (kg) Total Weight (lbs)	1300 2867
	Spare Part Guarantee	Lifelong

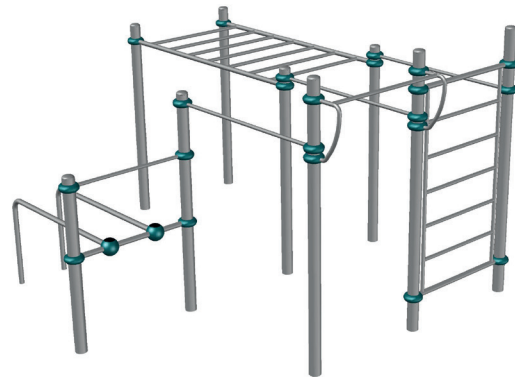

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

* Safety areas as well as free fall height are determined according to a play equipment standard or relevant outdoor fitness standard, depending on the installation. Individual planning is necessary.

Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

Posts:

Terranos®- steel pipes Ø 133 mm (5 ¼"), wall thickness 5 mm (3/16") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Tubes:

Stainless steel tubes Ø 40 mm (1 9/16") and 60,3 mm (2 3/8"), wallthickness 5 mm (3/16") smoothed and polished.

Terranos®-Clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos®- steel posts. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Spheres:

Frameworkx®-aluminum ball connectors, Ø 200 mm (7 7/8"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The tensioning ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.