

Liane

HodgePodge



Published: May 2023
















Liane

Product Specification

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. A calisthenics system for sport activity, climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

You too can be Tarzan of the Jungle! Lianas are swinging ropes dangling from curved posts. Use the ropes to swing your way from stump to stump without touching the ground. Older children in particular find this an irresistible challenge.

95.190.605

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("")	5,0 × 4,7 × 3,1 16-4 × 15-4 × 10-0
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	7,7 × 8,0 8,7 × 8,6 28-3 × 28-3
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,81 9-4
	Age	5
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	35,4 488,7
	Number of Foundations	5
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	3,2 113
	Number of skilled Installers required	3
	Installation Time without Foundation	8 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	0,2 × 0,2 × 5,8 0-8 × 0-8 × 19-4
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	220 485
	Shipping Volume (m³) Shipping Volume (ft³)	3,7 131
	Total Weight (kg) Total Weight (lbs)	640 1410
	Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.
The following text can also be used for tenders.

Posts:

Bent steel pipes Ø 133 mm (9 13/16"), wall thickness 7,1mm (1/4") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Spheres:



Framework®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

Suspension:

U-Rope®-round strand ropes with galvanised steel cores, external strands are covered with high abrasion-resistant and UV-resistant polyester-yarn (no polypropylene). The diameter is 25 mm (1") and they are connected to the joint with steel chains.

Palisades:

The palisades are made of durable and weatherproof EPDM rubber and have a diameter of Ø 250 mm (9 13/16").

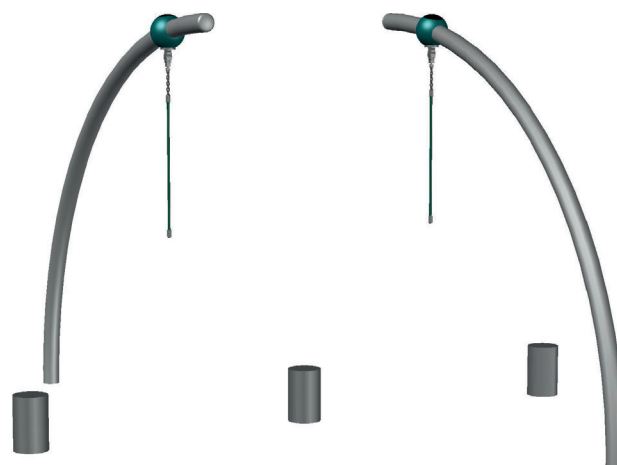

1:200