

Chessboard Cube.02

Terranos & Terranova


















Published: August 2023

Chessboard Cube.02 Product Specification

Here you can really let off steam! Racing across the rubber mats with friends takes a lot of energy, but is also tons of fun. The rubber membranes react to the movement of the others and encourage you to join in. But this is also a good place to relax.

Chessboard Cube.02

95.173.532

	Product Family	Terranos & Terranova
	Length × Width × Height (m) Length × Width × Height ("-")	6,3 × 3,3 × 3,3 20-5 × 10-7 × 10-8
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("-")	9,7 × 6,7 9,9 × 6,9 32-5 × 22-7
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("-")	1,89 6-3
	Age	5-12
	Minimum Space required acc. to DIN EN 1176 (m ²) Minimum Space required acc. to ASTM 1487 (ft ²)	58,5 696,6
	Number of Foundations	26
	Concrete Volume C20/C25 (m ³) Concrete Volume C20/C25 (ft ³)	6,1 215
	Number of skilled Installers required	2
	Installation Time without Foundation	12 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("-")	4,2 × 0,2 × 0,2 13-10 × 0-6 × 0-6
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	93 205
	Shipping Volume (m ³) Shipping Volume (ft ³)	8,16 290
	Total Weight (kg) Total Weight (lbs)	1050 2320
	Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

Rubber Membrane:

Rubber membrane comprised of durable, vandal-resistant conveyor belt material. Thickness approx. 9 mm (3/8").

Ropes:


U-Rope®- round strand ropes with galvanized and covered wires. External strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene), Ø 16 mm (5/8").

Posts:

Terranos®- steel pipes Ø 133 mm (5 1/4"), wall thickness 7,1 mm (5/16") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Tubes:

Frameworkx steel pipes, Ø 60,3 mm (2 3/8"). Anti-corrosion treatment and color finish: sandblasting, galvanised and solvent-free epoxy-/ polyester-process.

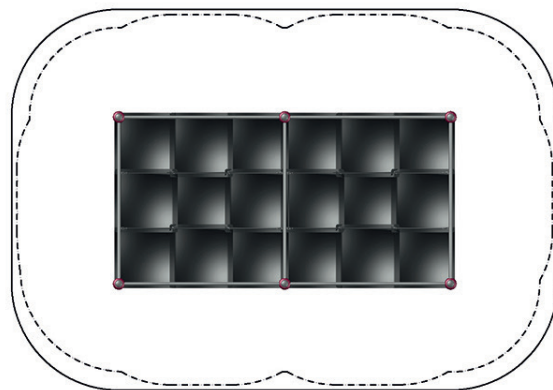

Terranos®-Clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos®- steel posts. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.